





TRB 702



TRB 703

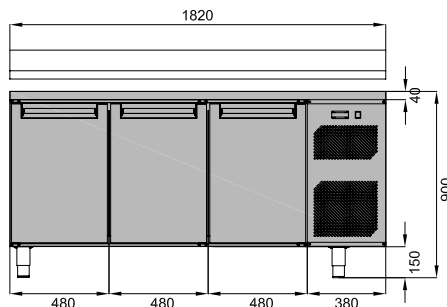

TRB 704

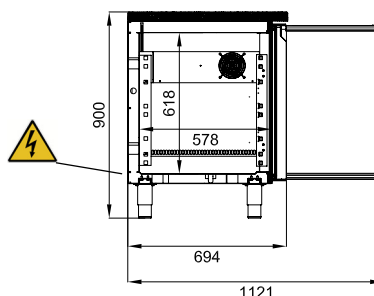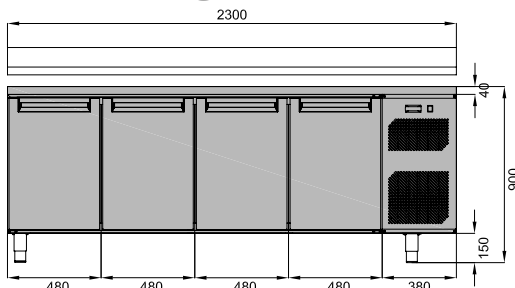

USCITA CAVO DI
ALIMENTAZIONE
ELECTRICAL
CONNECTION

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2000 =

-24°C / -18°C



38°C



60 UR%

TRB 700 GN - BT

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

230 V / 50 Hz					
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9TRB72IB..	9TRB73IB..	9TRB74IB..
Range		°C	-24°C / -18°C	-24°C / -18°C	-24°C / -18°C
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	1340	1820	2300
Altezza Height	Höhe Hauteur	mm	900	900	900
Profondità Depth	Tiefe Profondeur	mm	700	700	700
Capacità Capacity	Inhalt Capacité	dm³	307	478	650
Compressore Compressor	Kompressor Compresseur	ASPERA U.H.	T2168GK	T2180GK	J2192GK
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C/+45°C) Puissance frigorifique	kcal/h W	485 564	648 754	736 856
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 0,40	R 404A 0,40	R 404A 0,50
Capillare Capillary	Kapillarrohr Capillaire	diam. mm	1,24/0,049" 3000	1,24/0,049" 2500	1,37/0,054" 3000
Ventilatore del cond. Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	10	10	10
Ventilatore dell' evap. Evaporator fan	Verdampferlüfter Ventilateur de l'évaporateur	W	14	14	2 X 14
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique	CAREL	PJEZC	PJEZC	PJEZC
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h	kWh/24h (W)	10.2 (620)	14.5 (690)	16.3 (750)
Rumorosità Noise	Lautstärke Bruit	db	52	53	55
Peso Weight	Gewicht Poids	Kg	140	183	226

AFINOX S.r.l.
BOZZA
UFFICIO TECNICO