





TRK 802

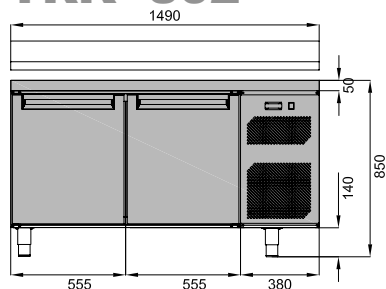

TRK 803

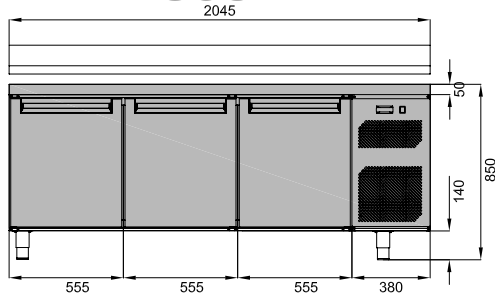

TRK 804

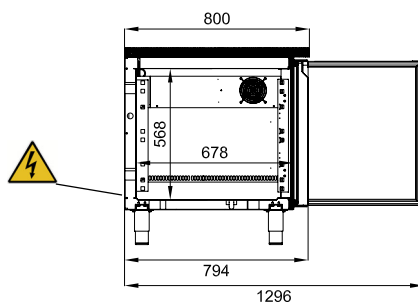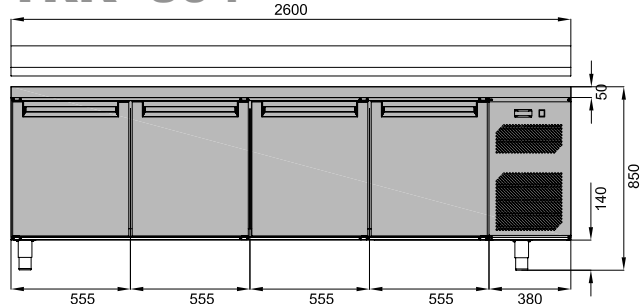

USCITA CAVO DI
ALIMENTAZIONE
ELECTRICAL
CONNECTION

COMPANY
WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2000 =

-24°C / 18°C



38°C



60 UR%

TRK 800 PAST-BT

Specifiche Tecniche - Specifications - Technische Daten - Données Techniques - Dato Técnicos

230 V / 50 Hz					
Codice prodotto Item code no	Produkt-Kode-Nr. Nr. de code du produit	inox*rostfr.St s/s*inox	9TRK82IB..	9TRK83IB..	9TRK84IB..
Range		°C	-24°C / -18°C	-24°C / -18°C	-24°C / -18°C
Lunghezza esterna Outside length	Aussenlänge Longueur extérieure	mm	1490	2045	2600
Altezza Height	Höhe Hauteur	mm	850	850	850
Profondità Depth	Tiefe Profondeur	mm	800	800	800
Capacità Capacity	Inhalt Capacité	dm³	389	603	816
Compressore Compressor	Kompressor Compresseur	ASPERA U.H.	T2168GK	T2180GK	J2192GK
Potenza frigorifera Refrigeration power	Kalorienleistung (-30°C/+45°C) Puissance frigorifique	kcal/h W	485 564	648 754	736 856
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 0,40	R 404A 0,40	R 404A 0,50
Capillare Capillary	Kapillarrohr Capillaire	diam. mm	1,24/0,049" 3000	1,24/0,049" 2500	1,37/0,054" 3000
Ventilatore del cond. Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	10	10	10
Ventilatore dell' evap. Evaporator fan	Verdampferlüfter Ventilateur de l'évaporateur	W	14	14	2 X 14
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Centrale électronique	CAREL	PJEZC	PJEZC	PJEZC
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h	kWh/24h (W)	10.2 (620)	14.5 (690)	16.3 (750)
Rumorosità Noise	Lautstärke Bruit	db	52	53	55
Peso Weight	Gewicht Poids	Kg	130	170	210

AFINOX S.r.l.
BOZZA
UFFICIO TECNICO