





APX 300 TN PC

M2(-1°C+7°C)
+32°C 60% UR

230V - 50 Hz

SET POINT:
SET MIN -2°C
SET MAX +10°C

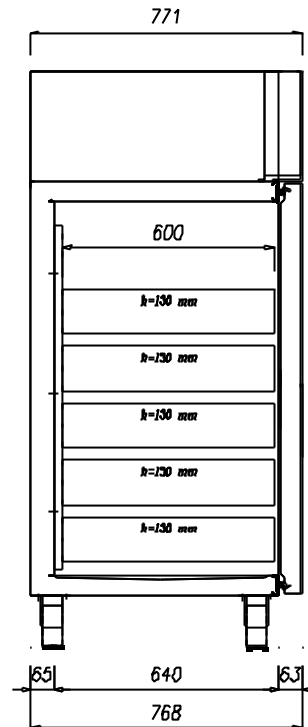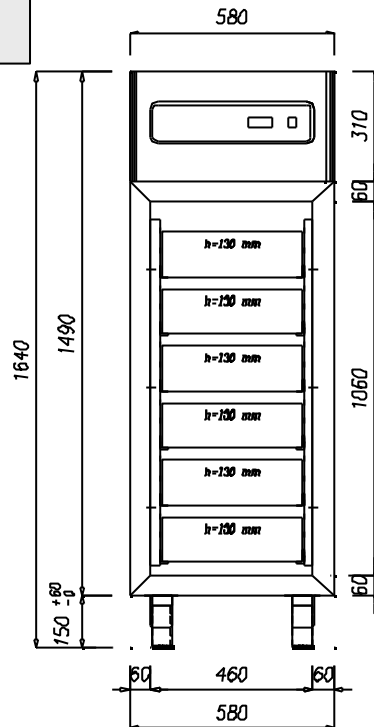

Mod. Statico

Mod. Ventilato

Codice prodotto Item code no.	Produkt-Kode-Nr. Nr. de code du produit	codice	9APX03TNCN...	9APX03TNCN...
Lunghezza esterna Outside dimension	Aussenlänge Longueur extérieure	mm	580	580
Profondità Depth	Tiefe Profondeur	mm	771	771
Capacità Storage capacity	Inhalt Capacité	dm ³	300	300
Compressore Compressor	Kompressor Compresseur	ASPERA	NB6152GK	NB6152GK
Potenza frigorifera Refrigeration power	Kalorienleistung (-10°C) Puissance frigorifique	kcal/h W	302 351	302 351
Fluido refrigerante Refrigerant fluid	Kältemittel Gas frigorigène	kg	R 404A 0.230	R 404A 0.230
Capillare Capillary	Kapillarrohr Capillaire	Ø cm	0.049 220	0.049 220
Ventilatore del condensatore Condenser fan	Kondensatorlüfter Ventilateur du condensateur	W	-	10
Ventilatore dell' evaporatore Evaporator fan	Verdampferlüfter Ventilateur de l'évaporateur	W	13	13
Centralina elettronica Electronic central unit	Elektronisches Steuergehäuse Platine électronique	Mod. ELIWELL	EWIC111	EWIC111
Potenza assorbita Absorbed power	Leistungsaufnahme Puissance absorbée	W	396	408
Consumo giornaliero/24h Daily consumption/24h	Tagesverbrauch/24h UNI EN 441-9 Consommation par jour/24h	kWh	1.5	2
Rumorosità Noise	Lautstärke Bruit	dB	45	45
Peso Weight	Gewicht Poids	Kg	110	110